

ASSEMBLY INSTRUCTIONS

Malaguti



Date: 13.05.2019 Version: 1

ASSEMBLY INSTRUCTIONS Monte 125/Monte Pro 125

1. Cut the straps with a knife



2. Remove the carton



3. Remove the straps of the fixed handlebar



4. Remove the straps of the fixed upper plate

Report Nr.:

-

Created by:

Model:

Monte 125/Monte Pro 125

Checked by:

VIN Nr.:

Page 1/4

ASSEMBLY INSTRUCTIONS

Malaguti



Date: 13.05.2019 Version: 1

ASSEMBLY INSTRUCTIONS Monte 125/Monte Pro 125

5. Remove the dust bag, protective carton, paper partition, and then remove the vehicle from the iron frame




6. Remove the protective paper



7. Install the handlebar on the upper board;


7_1. First remove the clamps, then place the handlebar on the upper seat, pre-tighten the screws diagonal, then adjust concerning the angle and the left and right symmetry (the default point is aligned with the gap)

Handlebar symmetry

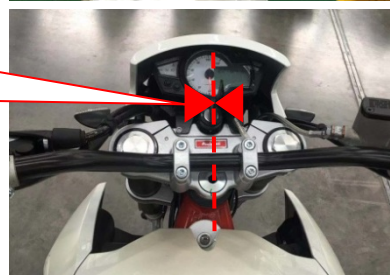

7_2. Diagonal fastening bolts, afterwards torque calibration with torque wrench: 17-19 Nm

* Fastening sequence A-B-C-D (diagonal fastening);
*Torque: 17-19 Nm

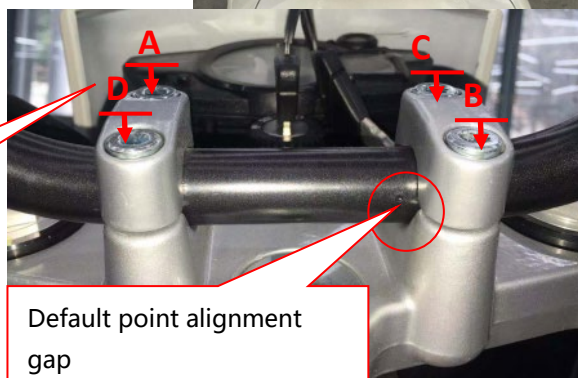

Default point alignment gap

Report Nr.:

-

Created by:

Model:

Monte 125/Monte Pro 125

Checked by:

VIN Nr.:

Page 2/4

ASSEMBLY INSTRUCTIONS

Malaguti



Date:

13.05.2019


Version:

1

ASSEMBLY INSTRUCTIONS Monte 125/Monte Pro 125

8. Install the left/right rear view mirror (clockwise)

Right rear view mirror

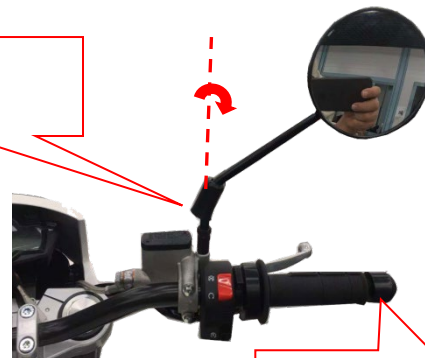

Balance block

9. Attach the balance block to the handlebar with 2 GB70 hexagon socket screws M6×45 (white zinc grade 8.8);

Left rear view mirror

Balance block



GB70 hexagon socket screws M6×45
(white zinc grade 8.8)

Report Nr.:

-

Created by:

Model:

Monte 125/Monte Pro 125

Checked by:

VIN Nr.:

Page 3/4

ASSEMBLY INSTRUCTIONS

Malaguti



Date: 13.05.2019 Version: 1

ASSEMBLY INSTRUCTIONS Monte 125/Monte Pro 125

10. Assembling battery

* Disassemble some parts before assembling the battery (see the illustration on the right) so that the battery can be placed into the battery case.

ATTENTION: The battery must be installed horizontally! The battery poles must point towards the rear of the vehicle! See photos at the bottom of the page!



▲ Remove the seat cushion



◀ Remove the two bolts on the tank





▲ Lift the tank and put the battery in and install the battery strap



▲ Remove the left and right side covers



▲ Remove the 4 bolts in front of the fuel tank cover

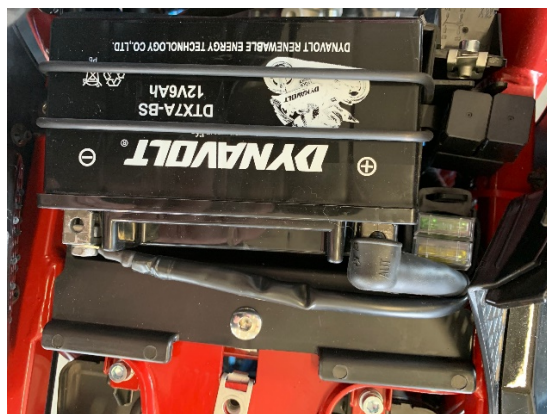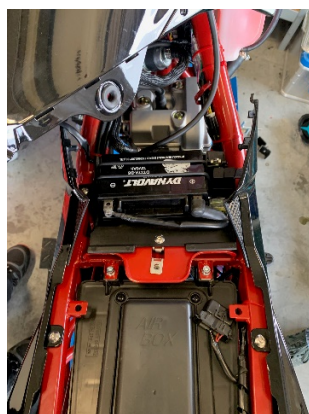

11. After the end, check the vehicle according to the PDI.

| | | | |
|-------------|-------------------------|-------------|--|
| Report Nr.: | - | Created by: | |
| Model: | Monte 125/Monte Pro 125 | Checked by: | |
| VIN Nr.: | | | |
| Page 4/4 | | | |